



CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	CURB CUT FOR RAMP OR DRIVEWAY (OPTIONAL)	STANDARD NO. 470S-1
RECORD COPY SIGNED BY BILL GARDNER	03/26/08 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.
		1 OF 2

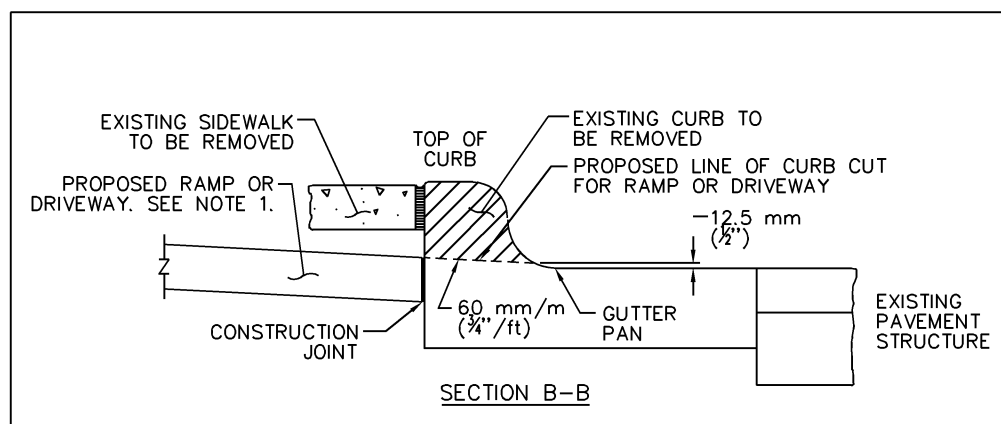


- NOTES:
- SEE RAMP STANDARDS 432S-5, 432S-5A AND 532S-5B OR DRIVEWAY STANDARDS 433S-1, 433S-1A AND 433S-2.
  - THIS METHOD CANNOT BE USED IF THE EXISTING CURB AND GUTTER ARE CRACKED. REMOVAL OF THE ENTIRE CURB AND GUTTER IS REQUIRED IN THOSE CASES. (SEE STANDARDS 432S AND 433S SERIES.)
  - CURB CUTS SHOULD NOT EXCEED 9 m (30') FROM WING TIPS.
  - CURB CUTS MAY ONLY BE USED WITH TYPE 1, FLARED DRIVEWAYS, SEE STANDARD 433S-1A.
  - IF CURB CUT IS FOUND NOT STANDARD, ENTIRE CURB AND GUTTER MUST BE REMOVED TO THE NEXT NEAREST JOINT.

CITY OF AUSTIN DEPARTMENT OF PUBLIC WORKS	CURB CUT FOR RAMP OR DRIVEWAY (OPTIONAL)	STANDARD NO. 470S-1
RECORD COPY SIGNED BY BILL GARDNER	03/26/08 ADOPTED	THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR APPROPRIATE USE OF THIS STANDARD.
		2 OF 2

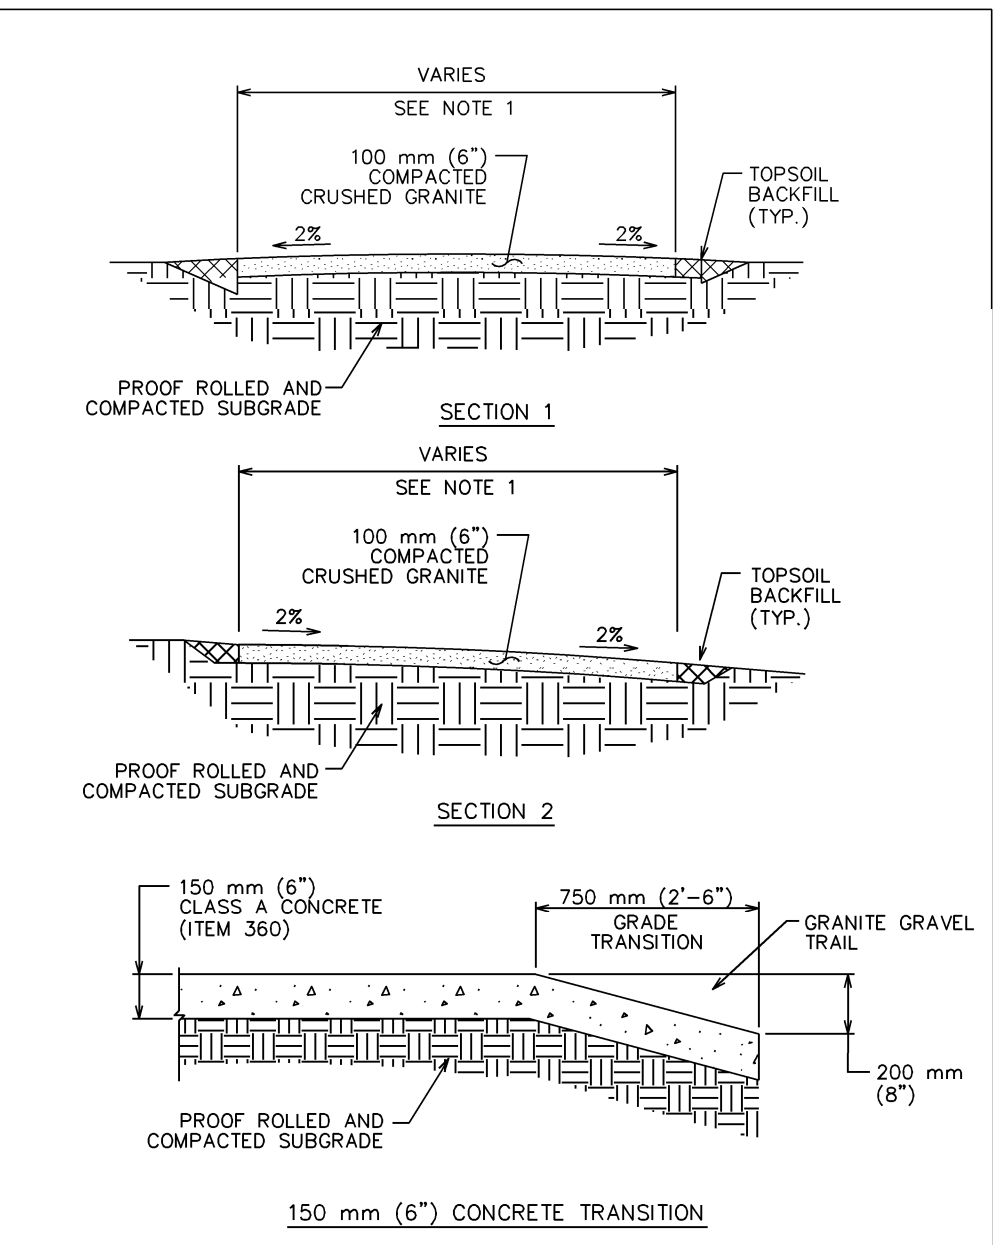



- NOTES:
- ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ENGINEERING DRAWINGS.
  - EXISTING TREES, PROPERTY AND PUBLIC RIGHT-OF-WAYS SHALL BE PROTECTED FROM DAMAGE BY TRUCKS AND/OR EQUIPMENT.
  - THE GRANITE GRAVEL WEARING COURSE SHALL BE 100 mm (4"), COMPACTED.
  - THE WEARING MATERIAL SHALL BE COMPRISED OF UNWASHED GRANITE AGGREGATE AND RED CLAY FINES THAT CONFORM TO STANDARD SPECIFICATION ITEM SECTION 1301S.3, "MATERIAL".
  - UPON COMPLETION OF TRAIL CONSTRUCTION, ALL GRANITE GRAVEL SHALL BE REMOVED FROM ADJOINING HARD SURFACES (I.E. RETAINING CURB/WALL, SIDEWALKS, RUBBER SAFETY SURFACES, PLAYSCAPE DECKS OR RAMPS).
  - ALL ADJACENT HARD SURFACES, SUCH AS CURBS OR WALKS, SHALL BE INSTALLED PRIOR TO INSTALLATION OF GRANITE GRAVEL.

GRANITE GRAVEL HIKE AND BIKE TRAILS
-------------------------------------

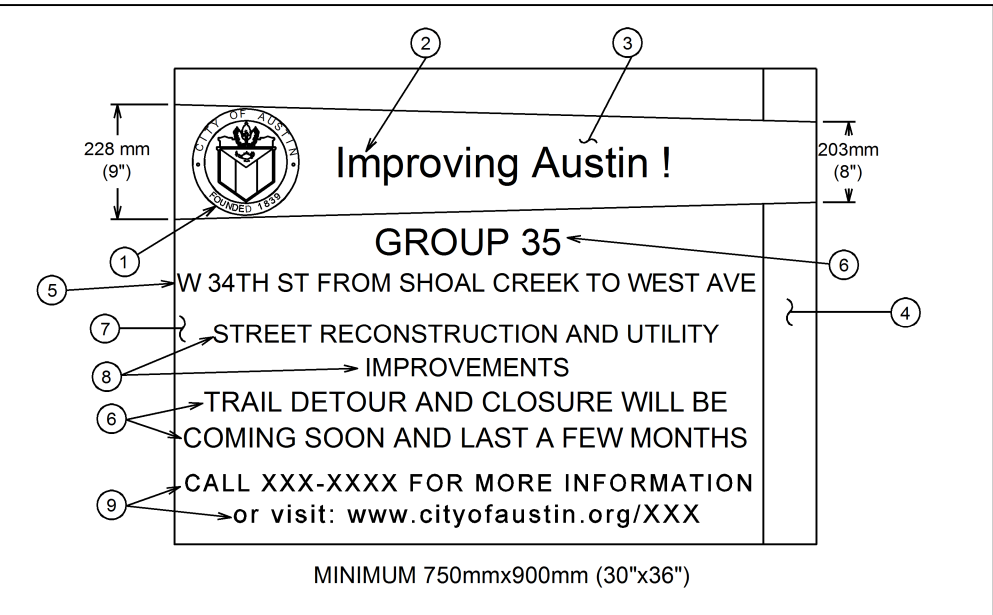

- MINIMUM 750mmx900mm (30"x36")
- 225 mm (9") CITY SEAL (4 COLOR PROCESS)
  - 50 mm (2") WHITE LETTERS
  - TRANSPARENT BLUE PAINT
  - 75 mm (3") WIDE-TRANSPARENT YELLOW PAINT STRIPE
  - 38 mm (1 1/2") BLUE LETTERS
  - 83 mm (2 1/2") BLUE LETTERS
  - HIGH INTENSITY WHITE REFLECTIVE SHEETING, .080 ALUMINUM 2290, M CO. OR EQUAL
  - 25 mm (1") BLUE LETTERS
  - 25 mm (1") RED LOWER CASE LETTERS

MOVABLE ADVANCE SIGNING FOR TRAIL CLOSURE
1 OF 2

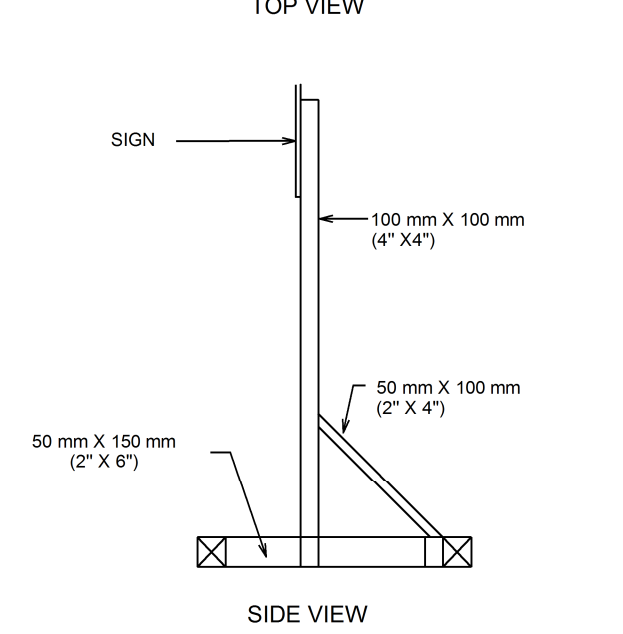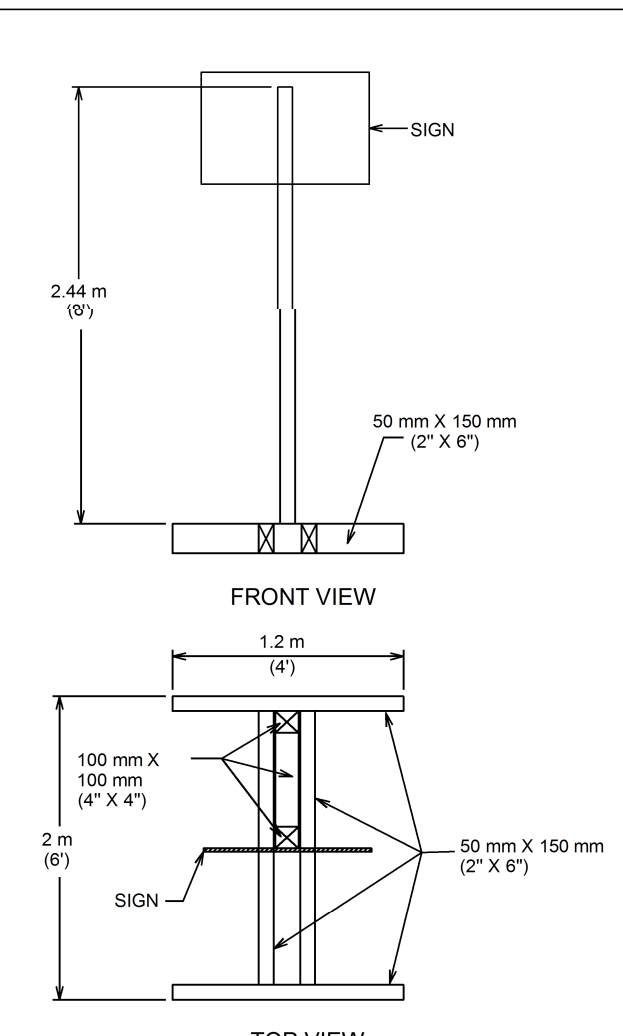

- NOTES:
- ALL MATERIALS SHALL BE FURNISHED BY THE CONTRACTOR.
  - LUMBER DIMENSIONS ARE NOMINAL.
  - SIGN MUST BE IN COLOR.

MOVABLE ADVANCE SIGNING FOR TRAIL CLOSURE
2 OF 2